




TECHNICAL DATA SHEET

VIA Tile Oil

Colour-enhancing, open-pored natural oil for cement-bound floors

VIA Tile Oil is a colour-enhancing, deeply penetrating and open-pored natural product for the surface treatment of cement-bound floors. It is free from toxic substances and free from allergenic terpenes.

The oil does not form a film but penetrates into the face layer and protects from within. The colours become noticeably richer and deeper. The surface remains vapour-permeable and can be treated locally without visible overlaps.

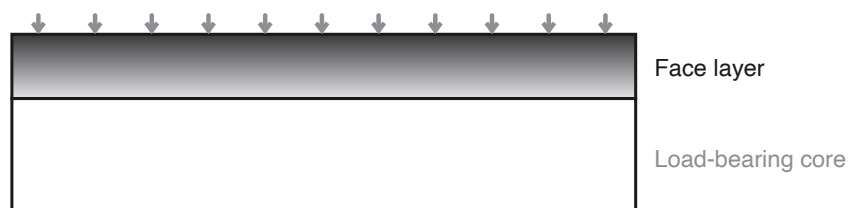

The oil penetrates into the face layer and forms no surface film

PRODUCT

Composition

- Aromatic-free hydrocarbons
- Safflower, poppy seed, walnut, rapeseed, soya and sunflower oil
- Beeswax, candelilla wax, carnauba wax
- Lead-free and barium-free metallic soaps as driers
- Free from allergenic terpenes

TECHNICAL DATA

Technical Data


Product type	Colour-enhancing, open-pored impregnating oil
Consumption	1 l for approx. 30 to 40 m ²
Tool	Foam roller, car polishing machine
Delivery viscosity DIN 4 mm	approx. 15 s
Do not walk on for	24 hours
Full load after	8 to 10 days
Water contact	excluded during the first 8 to 10 days
Packaging	1 l

Shelf life	approx. 2 years
Storage class	10, at 15 to 30 °C
VOC content	548 g/l, limit value 700 g/l, category A/f
WGK	1

APPLICATION

Application

- 1 Prepare the surface**
The floor must be completely dry, clean and free from cement haze. Oil only around five days after grouting.
- 2 Apply**
Apply the oil generously and evenly with the foam roller. Work in manageable sections.
- 3 Roll again**
Re-roll absorbent areas until the surface is evenly saturated.
- 4 Work in**
Work the oil in thoroughly with a car polishing machine. No oil may be left standing on the surface.
- 5 Remove surplus**
Completely remove any remaining oil with absorbent cloths. Standing oil dries sticky.
- 6 Allow to cure**
Do not walk on for 24 hours. Full load-bearing capacity is reached after 8 to 10 days.

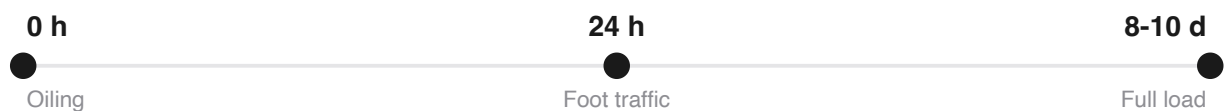

During the first 8 to 10 days the surface must have no water contact.

SPONTANEOUS COMBUSTION

Fire Risk from Cloths

RISK OF SPONTANEOUS COMBUSTION

Cloths, rags, pads and sanding dust soaked with VIA Tile Oil can ignite spontaneously while drying. Immediately after use they must be soaked in water, sealed airtight in a metal container or dried outdoors spread out individually. Never leave them lying crumpled up.

PREPARATION

Covering and Site Protection

- Do not use plastic sheeting. It traps moisture and prevents the oil from oxidising.

- Use cotton sheets or vapour-permeable coverings.
- Do not apply adhesive tape to the oiled surface.
- Ventilate rooms well during drying.
- Do not place furniture or point loads on the floor during the first few days.

CARE

Care

- After full curing, maintain with VIA Tile Soap or VIA Soft Soap.
- Mop damp, no standing water.
- Heavily used areas can be re-oiled locally at any time without visible overlaps.
- Do not use acidic or abrasive cleaners.

SAFETY

Labelling and Disposal

Classification	not classified as hazardous
EUH210	Safety data sheet available on request.
P101	If medical advice is needed, have product container or label at hand.
P102	Keep out of reach of children.
P103	Read label before use.
Waste code	08 01 12

Further information is given in the safety data sheet for VIA Tile Oil.

VIA GmbH
Mainzer Straße 33-35
55422 Bacharach, Germany

Tel. +49 6743 9 37 08 0
Fax +49 6743 9 37 08 20

mail@viamaterial.de
www.viamaterial.de

The information is based on our current knowledge and careful testing. It does not constitute a warranty of properties and does not release the applicator from verifying suitability for the intended use. On publication of this edition all previous versions become invalid.

Version 01 / 2020